QJAR

QJRP10-1



HASKOM Automation
"We Understand Robotics"

Authorized distributor HASKOM Automation s.r.o.
Find out more at qjar.eu

CE


Specifications and Drawings of QJRP10-1

I. QJRP10-1 Robot basic specification table


QJRP10-1 Basic specification sheet			
Body shape		Vertical multiarticular	
Degrees of freedom		6	
The payload		10kg	
Arm span		2035mm	
Repeated positioning accuracy ^2		±0.5mm	
Mechanical limit range	1axis	±95°	
	2axis	+102° , -53°	
	3axis	+87° , -80°	
	4axis	±260°	
	5axis	±270°	
	6axis	±260°	
Maximum speed	1axis	1.9 rad/s	108 °/s
	2axis	2.1 rad/s	120 °/s
	3axis	2 rad/s	114 °/s
	4axis	6.3 rad/s	360 °/s
	5axis	6.3 rad/s	360 °/s
	6axis	6.3 rad/s	360 °/s
Maximum acceleration	1axis	6.6 rad/s^2	378 °/s^2
	2axis	6.6 rad/s^2	378 °/s^2
	3axis	8 rad/s^2	458 °/s^2
	4axis	30 rad/s^2	1718 °/s^2
	5axis	30 rad/s^2	1718 °/s^2
	6axis	26 rad/s^2	1489 °/s^2
Allow the torque	4axis	30.4 N.m	
	5axis	19.6 N.m	
	6axis	9.8 N.m	
Inertia moment	4axis	0.97 kg.m2	
	5axis	0.4 kg.m2	
	6axis	0.1 kg.m2	
Body weight		370 kg	
Protection Grade		IP65	
Installation environment	temperature	0~45 ℃	
	humidity	20%~80% RH(no condensation)	
	vibration	<4.9m/s2 (0.5G)	
	other	Avoid flammable, corrosive gases	


		and liquids; Avoid contact with water, oil, dust, etc. Keep away from electrical noise sources.
The power capacity		3.9kVA

II. QJRP10-1 Diagram of the robot's overall size and maximum motion range

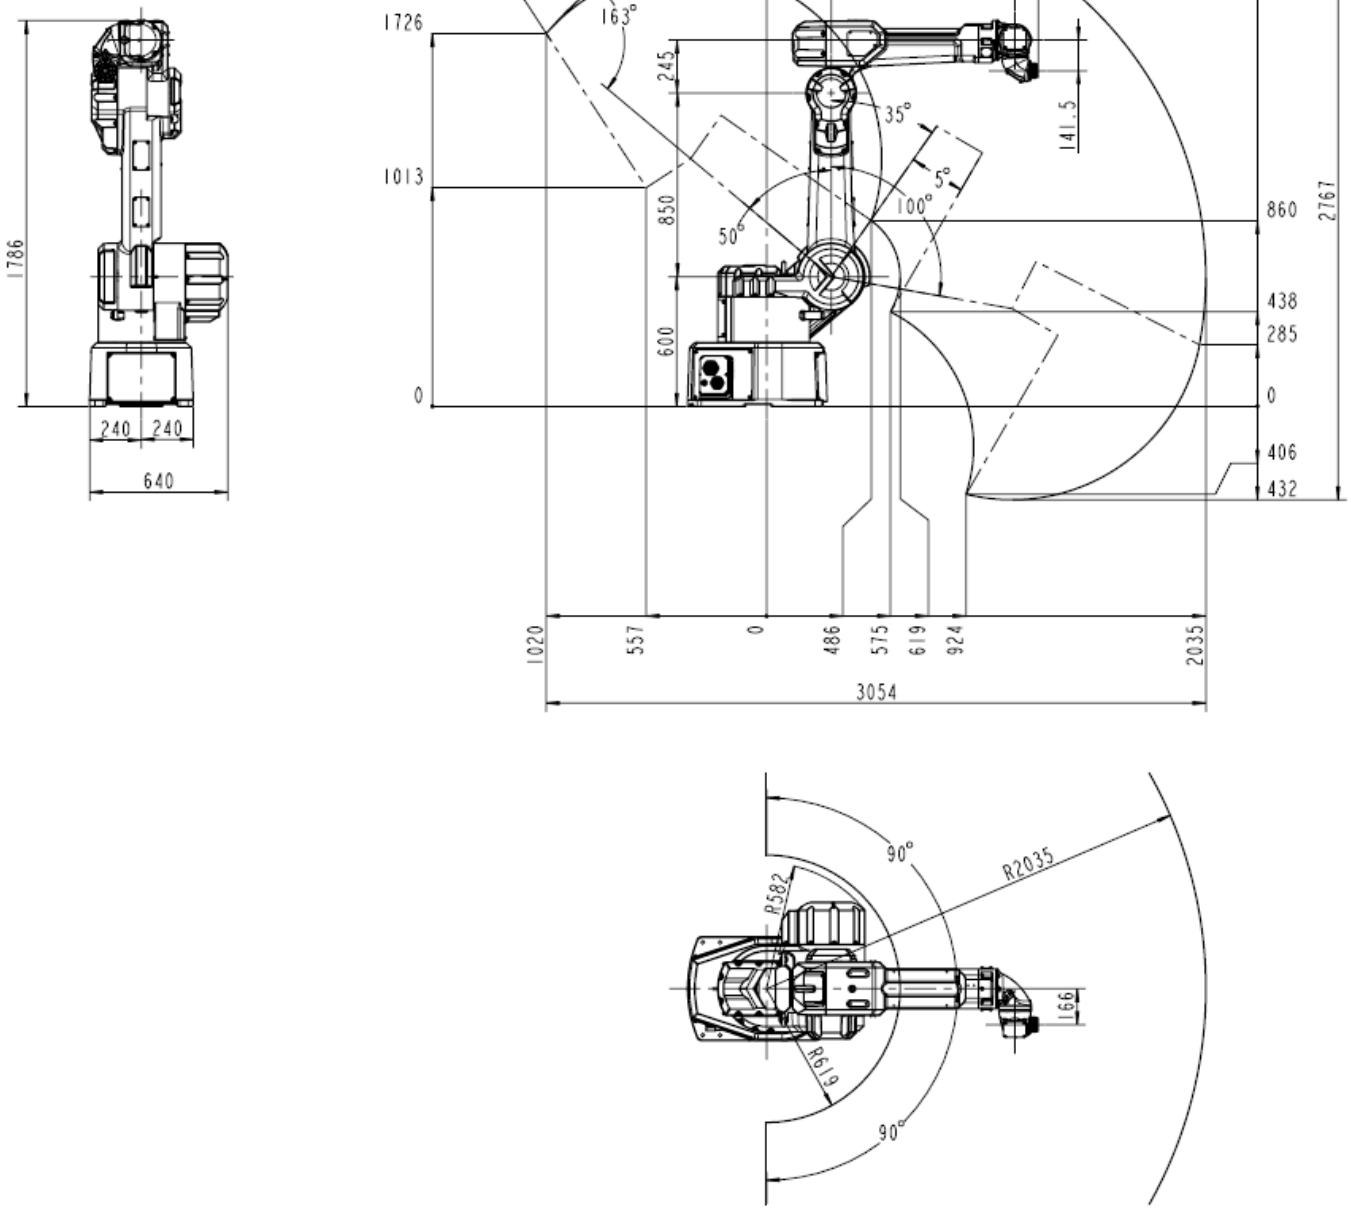



III. QJRP10-1 Robot base mounting dimension drawing

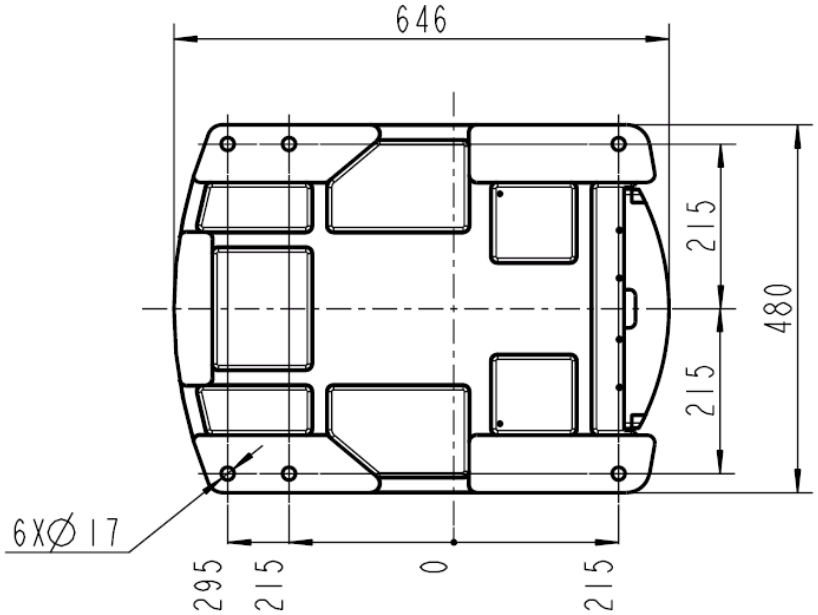

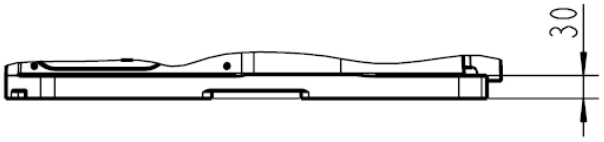


IV. QJRP10-1Installation dimension drawing of robot end

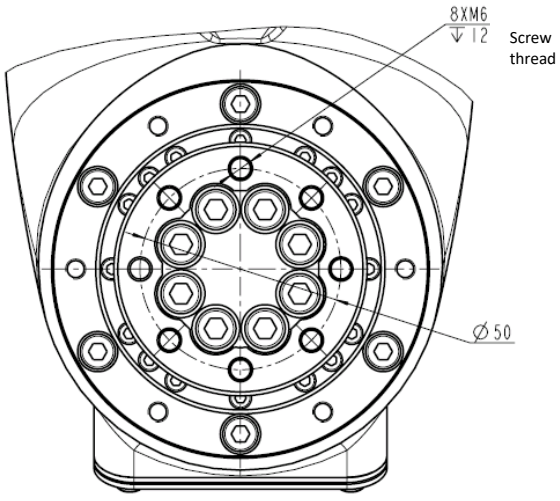

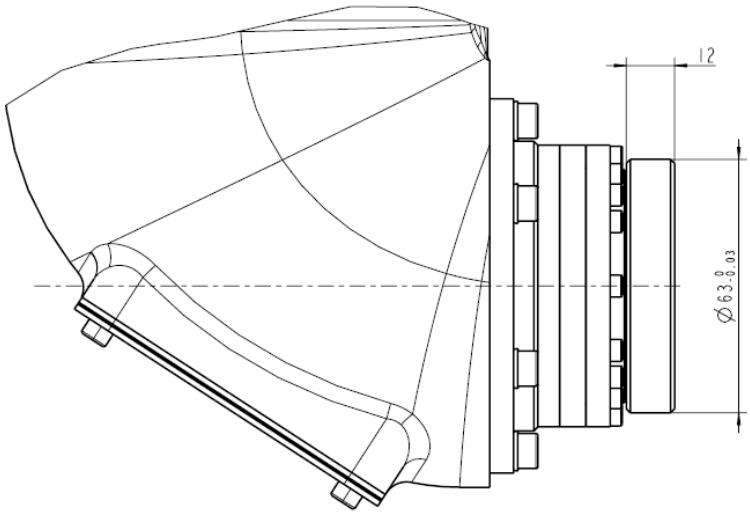

V. QJRP10-1 Robot load diagram

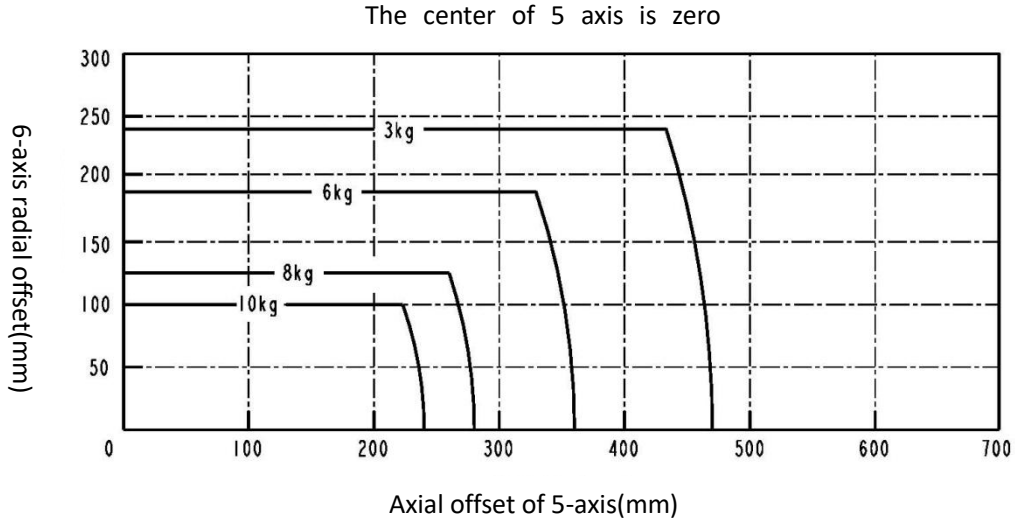

VI. QJRP10-1 Configuration table of robot products

QJRP10-1 Configuration table of robot products	
Motor	TAMAGAWA
RV Reducer	Nabtesco
Harmonic reducer	Shimpo
Planetary reducer	Shimpo
Controller	KEBA
Drive	Tsino dynatron

VII. QJRP10-1 Controller cabinet

QJRP10-1 controller cabinet Status 1	
Control hardware	KEBA
Control cabinet software	KEBA
Power Supply	Three phase four wire AC380V(+10%,-10%)
Rated power	6.5KW
Power capacity	3.9KVA
Size of control cabinet	650x750x1150mm
Weight of control cabinet	120kg
ambient temperature	0-45℃
Maximum humidity	20%~80% RH(no condensation)
Protection level	IP21
operation panel	On the control cabinet
Programming unit	Color touch screen teaching box
Security	Emergency stop, automatic mode stop, remote mode stop
Input and output	Digital IO 22 input 24 output

QJRP10-1 controller cabinet Status 2	
Control hardware	KEBA
Control cabinet software	KEBA
Power Supply	Three phase four wire AC380V(+10%,-10%)
Rated power	6.5KW
Power capacity	3.9KVA
Size of control cabinet	650x750x1150mm
Weight of control cabinet	140kg
ambient temperature	0-45℃
Maximum humidity	20%~80% RH(no condensation)
Protection level	IP54
operation panel	On the control cabinet
Programming unit	Color touch screen teaching box
Security	Emergency stop, automatic mode stop, remote mode stop
Input and output	Digital IO 21 input 24 output